

1000-BQ2/96 HOT HOLDING BANQUET CARTS



- HALO HEAT . . . a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Close temperature tolerance and even heat application provides even heat from top to bottom – side to side.
- Holds preplated food fresh, flavorful, and hot.
- No moisture pans, water or canned heat needed.
- Designed to adapt to any type of banquet holding:
 - Covered plates, stacked
 - Covered or uncovered plate carriers
 - Accepts trays for banquet service
 - Additional shelves for full-size and half-size pans (gastronorm pans)
- Non-magnetic stainless steel interior resists corrosion.
- Full perimeter, wall-friendly bumper, transport handles, and heavy duty casters.

Stainless steel exterior with two (2) transport handles on each end of the cart. The cabinet has an ON/OFF power switch; Up and Down Arrow Keys with a temperature range of 60° to 200°F (16° to 93°C); heat indicator light; temperature display key, and digital display. Four (4) chrome plated wire shelves are included. A full-perimeter, wall-friendly bumper is included, along with four (4) 6" (152mm) heavy duty casters, 2 rigid and 2 swivel with brake.

Flexible choice of preplated meal service: This banquet cart will also hold covered meals without plate carriers. Additional shelves will equip cart to hold preplated meals without covers, trays, and bulk food items in pans.

MODEL 1000-BQ2/96: Mobile banquet cart with capacity of 96 meals (10" covered plates)



ANSI/NSF 4




IP X4



FACTORY INSTALLED OPTIONS

- Door Choices
 - Full door, standard
 - Split door, optional
- Door Swing Choices
 - Right-hand swing, standard
 - Left-hand swing, optional
- Electrical Choices
 - 120V
 - 208-240V
 - 230V
- Trailer Hitch



SPECIAL INFORMATION:

- Plate covers are not furnished.
- Plate carriers are optional.
- Since plates and plate covers vary in size, cabinet may not hold maximum quantity of meals specified.



DC-2868



DC-2869



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.


PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com



1000-BQ2/96

HOT HOLDING BANQUET CARTS

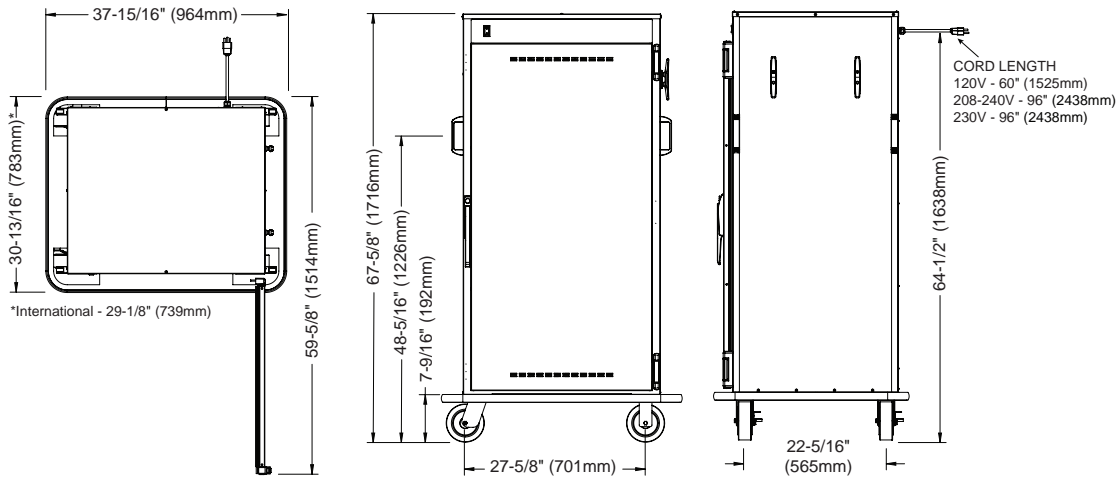





| | |
|------------------------------|-------------------------------------------------------------|
| DIMENSIONS: H x W x D | |
| EXTERIOR: | 67-5/8" x 37-15/16" x 30-13/16" (1716mm x 964mm x 783mm) |
| INTERIOR: | 52-7/8" x 28-1/4" x 25-1/2" (1342mm x 717mm x 647mm) |

| | |
|--------------------------------------------------------------------------------|------------------|
| WEIGHT | |
| NET | 322 lbs (146 kg) |
| SHIP | 415 lbs (188 kg) |
| CARTON DIMENSIONS: (L x W x H) 43" x 33" x 75" (1092mm x 838mm x 1905mm) | |

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| INSTALLATION REQUIREMENTS | |
| Cabinet must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions. | |

| | |
|----------------------------------------------------------------|--|
| CLEARANCE REQUIREMENTS | |
| Full perimeter bumper accommodates all clearance requirements. | |

| ELECTRICAL | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|------|-----|
| VOLTAGE | PHASE | CYCLE/HZ | AMPS | kW |
| 120 | 1 | 60 | 12.5 | 1.5 |
| 208 | 1 | 60 | 5.9 | 1.2 |
| 240 | 1 | 60 | 6.8 | 1.6 |
| 230 | 1 | 50/60 | 6.5 | 1.5 |
|  CEE 7/7  CH2-16P  BS 1363  AS/NZS 3112 | | | | |

| | |
|---------------------------------------------------------------------------------------------------------------------------------------|--|
| CAPACITY | |
| 240 lbs (109 kg) MAXIMUM VOLUME MAXIMUM: 150 QUARTS (190 LITERS) | |
| PLATES: (without plate carriers) | |
| — 8" - 8-3/4" (203mm - 222mm) with covers: 128 (8 per shelf) | |
| — 9" - 10" (229mm - 254mm) with covers: 96 (6 per shelf) | |
| — 10-1/4" - 12-3/4" (260mm - 324mm) with covers: 64 (4 per shelf) | |
| LARGER DIAMETER ITEMS WILL RESULT IN REDUCED PLATE CAPACITIES | |
| PANS: Full-size and half-size pan combinations (per shelf) | |
| — 12" x 20" (530mm x 325mm - GN 1/1): 2 | |
| — 12" x 10" (265mm x 325mm - GN 1/2): 4 | |
| ADDITIONAL WIRE SHELVES WITH SUPPORT CLIPS WILL ACCOMMODATE VARIOUS COMBINATIONS OF 2-1/2" (65mm), 4" (100mm) OR 6" (150mm) DEEP PANS | |
| SHELF CAPACITY*: (per shelf, without covers) | |
| — Shelves maximum: 16 SPACING ON CENTERS 3-5/32" (80mm) | |

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OPTIONS & ACCESSORIES | |
| <input type="checkbox"/> Plate Carriers, chrome plated (EACH HOLD 4 PREPLATED MEALS) <input type="checkbox"/> Uncovered "P" Carriers DC-2868 Plate dia: 10" (254mm) max. • 7-3/4" (197mm) min. Vertical rung spacing: 2-5/8" (67mm) CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS <input type="checkbox"/> Covered "C" Carriers DC-2869 Plate dia: 9-3/4" (248mm) max. • 7-3/4" (197mm) min. Vertical clearance between top and bottom carrier: 11-5/8" (295mm) CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS | <input type="checkbox"/> Plate Carriers, chrome plated (EACH HOLD 4 PREPLATED MEALS) <input type="checkbox"/> Uncovered "EP" Carriers DC-23580 Plate dia: 12-1/2" (318mm) max. • 9-1/2" (241mm) min. Vertical rung spacing: 2-5/8" (67mm) CAPACITY: 16 CARRIERS, 64 PREPLATED MEALS <input type="checkbox"/> Covered "EC" Carriers DC-23676 Plate dia: 12-1/2" (318mm) max. • 9-1/2" (241mm) min. Vertical clearance between top and bottom carrier: 11-5/8" (295mm) CAPACITY: 16 CARRIERS, 64 PREPLATED MEALS |
| <input type="checkbox"/> Door Lock with Key LK-22567 <input type="checkbox"/> Shelf Support (2 required for each shelf) 1061 <input type="checkbox"/> Shelf Support Clip (1 required for each shelf) 11533 <input type="checkbox"/> Wire Shelf, chrome plated SH-2835 | <input type="checkbox"/> Security Devices 5013816 Includes tamper-proof screws, control panel security cover, and door lock |

