20MSERIES



E22M3

Technical data sheet for

E22M3 ON THE SK23 STAND

Half Size Manual / Electric Convection Oven on a Stainless Steel Stand





E22M3

Unit shall be a Blue Seal electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Oven shall have capacity for three half size sheet pans. The oven shall have a single direction low velocity fan system. The oven shall be controlled by a mechanical thermostat with a range of 50-260°C, and 60 minute bake timer. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK23. Oven shall be fitted with a 13A plug-in cordset. Unit shall be supplied in 100% recyclable shipping packaging.

SK23

Unit shall be a Blue Seal Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for half size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E22M2 and E23M3. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 3 460mm x 330mm / 18" x 13" half size sheet pan capacity
- 3 GN 2/3 pan capacity
- 70mm tray spacing
- Compact 610mm width
- Single direction low-velocity fan
- 2kW heating power
- 13A plug-in cordset fitted
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Mechanical thermostat 50-260°C
- 60 minute timer with time up alarm
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 3 oven wire racks supplied
- 100% recyclable packaging

ACCESSORIES

Turbofan SK23 Oven Stand



20MSERIES

turbofan

E22M3

E22M3 Half Size Manual / Electric Convection Oven on a Stainless Steel Stand

CONSTRUCTION

Vitreous enameled fully welded oven chamber Stainless steel front, sides and top exterior

Stainless steel oven fan baffle

Removable 3 position chrome plated wire side racks

Oven racks chrome plated wire (3 supplied) Stainless steel frame drop down hinged door 5mm thick door outer glass

5mm thick low energy loss door inner glass

Heavy-duty counterbalanced door hinges

Wear resistant powder coated welded door handle

Stainless steel control panel

Aluminised coated steel base and rear panels

CONTROLS

Power ON control panel indicator Mechanical thermostat 50-260°C

Heating ON control panel indicator

Manual 60 minute timer Time-Up control panel indicator and buzzer

CLEANING

Stainless steel top and sides continuous exterior panel

Vitreous enameled oven chamber

Fully removable chrome plated oven side racks

Removable stainless steel oven fan baffle

Easy clean door system with hinge out door inner glass

(no tools required)

Removable plug-in oven door seal (no tools required)

76mm high stainless steel feet for easy access underside

SPECIFICATIONS

Electrical Requirements

230-240V, 50Hz, 1P+N+E, 2.1kW, 9A

13A cordset fitted

External Dimensions Width 610mm

552mm including 76mm feet Height

608mm Depth Oven Internal Dimensions 495mm Width Height 250mm 340mm Depth 0.042m3 Volume

34%"

Oven Rack Dimensions Width 460mm

Depth 330mm

Nett Weight (E22M3)

35.4kg

Packing Data (E22M3)

48kg

0.34m3

Width 750mm Height 705mm 635mm Depth

SK23 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E22 and E23 Series ovens

6 position tray runners standard

4 76mm diameter wheel swivel castors standard with

2 front castors with dual swivel and wheel lock

Welded 38mm and 32mm square tube front and rear frames Welded rack supports/side frames

Top frame oven supports suit Turbofan E22 and E23 Series oven mounting

Supplied CKD for assembly on site

External Dimensions (SK23 Oven Stand)

Width 610mm Height 880mm Depth 530mm

Nett Weight (SK23 Oven Stand)

Packing Data (SK23 Oven Stand) 18kg

0.09m3 Width 630mm

900mm Height 152mm Depth

INSTALLATION CLEARANCES

25mm Rear LH Side 25mm RH Side 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is

OBLUE SERL

blue-seal.co.uk turbofanoven.com

United Kingdom Blue Seal Limited

Unit 67

Gravelly Business Park

Gravelly

Birmingham B24 8TQ

England

Telephone 0121-327 5575 Facsimile 0121-327 9711

sales@blue-seal.co.uk www.blue-seal.co.uk

Australia Moffat Pty Limited

740 Springvale Road Mulgrave, Victoria 3170 Australia Telephone 03-9518 3888


Facsimile 03-9518 3833 vsales@moffat.com.au www.moffat.com.au

New Zealand Moffat Limited

Christchurch 45 Illinois Drive Izone Business Hub Rolleston 7675

Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

www.moffat.co.nz

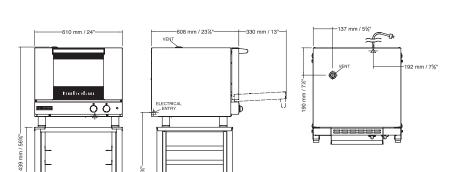



Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice



Copyright Moffat Ltd UK.TFN.S.1701

an Ali Group Company

