

ELEVATION SERIES GRANDE CUBE MAKER CIMO836/0835



Model:

- CIMO836
- □ CIMO835

Features and Benefits

- 30.25" (768 mm) wide space-saving design.
- Produces up to 845 lbs (383 kg) of ice per day.
- · Energy and Environment
 - Exceeds new 2018 DOE (Department of Energy) regulations.
 - Up to 20% more energy efficient than other models.
 - Environmentally friendly, including BPA-free plastic and recyclable parts.
- Sanitation
 - Plastic Food Zone eliminates hard-to-clean nooks and crannies, allowing for effortless wipe down and easy, long-lasting sanitation.
 - Built in Agion® ensures unbeatable antimicrobial protection.
 - Smart LED light indicates machine status and when cleaning is required.
 - Simple, one-touch controls for sanitization and descaling.
 - BPA-free snap-in, snap-out dishwasher-safe components.
- Unique Dual Exhaust Air-cooled machines are designed to discharge hot air from both the side and top of the unit, increasing installation flexibility and reducing the potential of obstructed exhaust.
- Universal Smart Harness[™] control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

Safelce Purification System is an add-on option for CIM machines that destroys Coronavirus, Flu, Odors, Mold and other biological contaminants, increasing the life of the machine by up to 30%.

https://www.youtube.com/watch?v=toReJT8QG6A&t=7s

SafeIce
*Available for factory or field install



Bin Chart Kits for Combining Wider Bins with Smaller Models

GRANDE CUBE DIMENSIONS						
W x D x H (in.)	11/4 x 11/8 x 7/8					
W x D x H (mm)	31 x 29 x 22					



G	R	Α	Ν	D	E
	С	U	В	Ε	

	ICE STORAGE BINS										
	Model No. Capacity Width	B25 242 lbs (110 kg) 30 in (762 mm)	B40 344 lbs (156 kg) 30 in (762 mm)	B42 351 lbs (160 kg) 22 in (559 mm)	B55 510 lbs (232 kg) 30 in (762 mm)	B700 680 lbs (308 kg) 30 in (762 mm)	B110 854 lbs (388 kg) 48 in (1,219 mm)	B1000 1,000 lbs (454 kg) 48 in (1,219 mm)		B1325 1,325 lbs (601 kg) 60 in (1,524 mm)	B1660 1,660 lbs (753 kg) 60 in (1524 mm)
Kits	CIMO836	Kit Not Re	Doguirod	N/A	Kit Not Required		BPF-1	Hold Down Securement			
	CIMO835	KILINOLI	кеципеа	IN/A	KIL INOL I	кеципеа	DPF-1	Recommende		mended	

*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

Options & Accessories

WATER FILTERS						
Ice Machine Model	Manifold					
ree Placifile Ploaci	System	Replacement				
CIMO836	IFQ1	IOMQ (1)				
CIMO835	IFQI	10110(1)				

Note: All modular cube CIM units can be installed with manufacturer approved ozone delivery systems.

Ice Maker Warranty

COMMERCIAL WARRANTY							
Ice Maker	3 YEARS parts and labor						
Evaporator and Compressor	5 YEARS parts						
Evaporator (when enrolled in our filter program)	7 YEARS parts and labor						






















Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

Dual Exhaust for Installation Flexibility



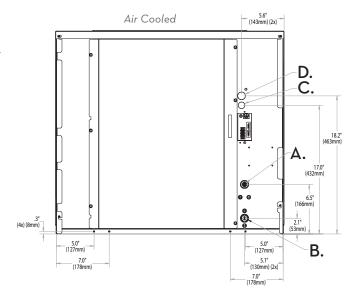

Operating Requirements

	MINIMUM	MAXI	MUM	
		60 Hz	50Hz	
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)	
Water Temp.	40°F (4.4°C)	100 F (38 C)	110 F (43 C)	
Water Pressure	20 PSIG (1.4 BAR)	R) 80 PSIG (5.5 BAR)		

Dimensions

ALL MODELS							
W x D x H (in.)	30.25 x 24.25 x 26.9						
W x D x H (mm)	768 x 616 x 683						

Specifications

		Ice Pro	e Cube duction 24hrs	Water Usage gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used				
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Max Breaker Size	Approx. BTUs per hour
CIMO836A	Air	896 (406)	625 (283)	19.0	N/A	5.45	208-230/60/1	13.9	20	18,200
CIMO835A	Air	845 (383)	710 (322)	18.0	TVA	5.7	220-240/50/1	15.2	25	19,300

^{*} Daily ice production based on grande cube configuration. When installing a CIM on a drink dispenser, the KCUBEDISPB MUST be used.

Number of Wires: 3 (including ground)
Approx. Shipping Weight lbs (kg): CIMO836A 230 (105) • CIMO835A 230 (105)

REFRIGERANT: R404A

Rev: 02/18 Part: C008