



OG8401/N - Lincat Opus 800 Natural Gas Countertop Chargrill - W 600 mm - 13.8 kW

Three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks. Individual zones can be turned off during quiet periods.

- Highly powerful infra-red burners respond quicker and heat faster than standard burners allowing you to increase your output and achieve energy savings
- Heavy-duty cast iron branding grids with reversible design, for uninterrupted cooking and self cleaning at maximum power

Embrace the unique power and versatility of the Opus 800 Three-Zone Gas Chargrill, which provides three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks.

Flame failure protection

Heavy duty radiant caps protect burners

Specifications

| Summary | | Power and Performance | |
|---------------------------|-----------------------------------|-----------------------------------------------------------------|-------------------------------|
| Brand | Lincat | BTU per Hour | 47,086 |
| Range | Opus 800 | Total Power kW | 13.8 |
| Power Type | Gas | Cooking Area (Width x Depth) mm | 500 x 620 |
| Gas Type | Natural Gas | Temperature Control | Mechanical |
| Unit Type | Counter-top | | |
| Available in UK Only | No | | |
| UK Warranty | 2 Years Parts and Labour Warranty | | |
| Export Warranty | Contact your local dealer | | |
| GTIN | 5056105102816 | | |
| Key Specifications | | Capacity | |
| Number of Heat Zones | 3 | Product Output per Hour | 78 x 225g[8oz]steaks[chilled] |
| Weights and Dimensions | | Supply Connections | |
| Unit Height (External) mm | 653 | Requires Installation | Yes |
| Unit Width (External) mm | 600 | Requires Electrical Supply | No |
| Unit Depth (External) mm | 806 | Gas Connection BSP | 1/2" |
| Net Weight Kg | 80.5 | Gas Consumption at full rate Natural m ³ per Hour | 1.24 |
| | | Gas Pressure Natural mbar | 20 |
| | | Total heat input at full rate Natural kW | 13.8 |
| | | Total heat input at full rate Natural BTU per hour | 47,087 |

Packed Weight Kg


| Packed weight Kg |
|------------------|
| Packed Height cm |
| Packed Width cm |
| Packed Depth cm |
| |

lincat



| Available Access | ories |
|------------------|-----------------------------------------------------------------------------|
| CH01 | Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU |
| CH02 | Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU |
| OA8950 | Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm |
| OA8950/C | Lincat Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm |
| RC03M | RADIANT COVER - OPUS 800 - UNDER DEVELOPMENT |

Technical Picture

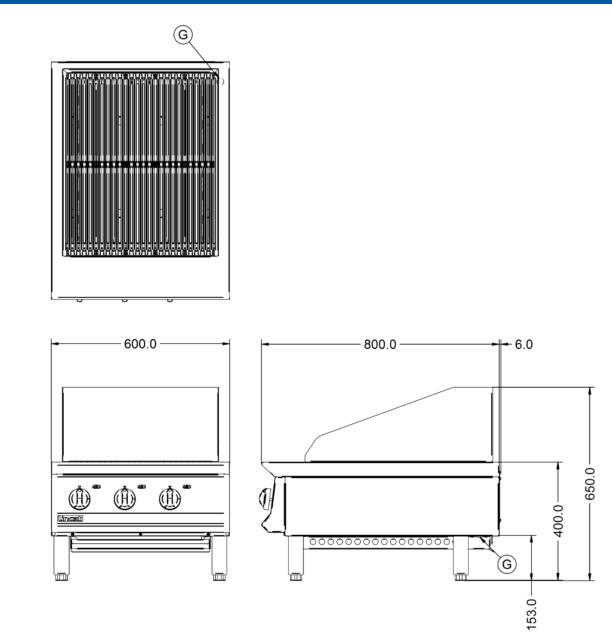

lincat



lincat fift

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm