lincat

SILVERLINK 600



J5/N - Lincat Silverlink 600 Natural Gas Freestanding Single Tank Fryer - 1 Basket - W 300 mm - 12.0 kW

- Single tank fryer delivering 22.5kg of chips an hour, perfect for pubs, restaurants and care homes
- Front mounted controls for safety
- Thermostatically controlled to give accurate cooking temperatures throughout cooking. Flame failure device and top temperature cut out ensures safe operation.
- Cool zone collects cooking debris gives cleaner cooking results and saves money by prolonging the life of the oil

Deliver perfectly crisp on the outside and fluffy on the inside chips time after time with the Silverlink 600 Free Standing Gas Fryer.

- Piezo ignition for easy lighting
- Heavy duty nickel plated baskets for the most demanding of operations
- Internal drain off tap for easy removal of cooking oil

Specifications

Summary		Power and Performance	
Brand	Lincat	BTU per Hour	40,944
Range	Silverlink 600	Total Power kW	12.0
Power Type	Gas	Temperature Range °C	110-190
Gas Type	Natural Gas	Temperature Control	Mechanical
Unit Type	Free-standing		
Available in UK Only	No		
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105105121		
Key Specifications		Capacity	
Key Specifications Number of Baskets	1		18kg chips -12mm [frozen], 22.5kg chips -
	1	Capacity Product Output per Hour	18kg chips -12mm [frozen], 22.5kg chips - 12mm [ch
Number of Baskets	1 1 No		
Number of Baskets Number of Tanks	1 1 No No	Product Output per Hour	12mm[ch
Number of Baskets Number of Tanks Gravity Filtration		Product Output per Hour	12mm[ch
Number of Baskets Number of Tanks Gravity Filtration Pumped Filtration	No	Product Output per Hour	12mm[ch
Number of Baskets Number of Tanks Gravity Filtration Pumped Filtration Drain Location	No	Product Output per Hour Capacity Litres	12mm[ch
Number of Baskets Number of Tanks Gravity Filtration Pumped Filtration Drain Location Weights and Dimensions	No Internal	Product Output per Hour Capacity Litres Supply Connections	12mm[ch 12.0

Gas Consumption at full rate Natural

Total heat input at full rate Natural

Total heat input at full rate Natural

Gas Pressure Natural mbar

m³ per Hour

BTU per hour

kW

1.14

16.3

11.5

38,900

Net Weight Kg

43




SILVERLINK 600


Shipping


47.3
122
85
45

Available Accessories	
CH01	Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU
CH02	Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU

Technical Picture





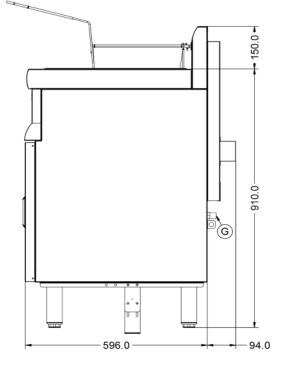



SILVERLINK 600

Lincat fift

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm